




MOE[®] AK Grip

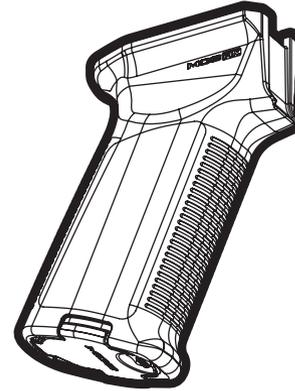

WARNING

BEFORE STARTING! MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY & THE SAFETY IS ENGAGED.




READ ALL INSTRUCTIONS BEFORE PROCEEDING TO AVOID LOSING ANY SMALL COMPONENTS.



MOE AK GRIP INSTALLATION INSTRUCTIONS




IMPROPER INSTALLATION AND/OR IMPROPER USE OF THIS PRODUCT MAY CAUSE WEAPON MALFUNCTION. WEAPON MALFUNCTION MAY CAUSE SERIOUS INJURY, INCLUDING GRIEVOUS BODILY HARM AND/OR DEATH.




STEP 1: REMOVE ORIGINAL GRIP

Turn rifle upside down. Remove original grip per armory guidelines. Take note of *t-nut* position in receiver.




STEP 2: REMOVE GRIP CAP

To remove the *Grip Cap*, use thumb and middle finger to hold the *Cap Extensions* that stick out either side (A). Using index finger, push the *Cap Locking Tab* (B) towards the rear of the grip at the same time pulling the *Cap* down and free of the *Grip Body*.



STEP 3: INSTALL GRIP

Position *t-nut* in receiver. Fit *MOE Grip* onto lower receiver. Using a *flat-head screw driver* install the supplied *Pan-Head Screw* through the front hole and hand tighten to *t-nut*. Reinstall *Grip Cap*.



STEP 5: VERIFY INSTALL

Perform final inspection including function check to verify proper weapon function.

Always test fire your weapon before using it in an operational environment.